



L Series Linear Wall Sconce, 54 W, 5400 lm, 5 Selectable CCTs, IP65, Black

- 54 W draw with 5400 lm delivered output
- Five selectable color temperatures, 2700 K through 5000 K
- IP65 waterproof rating for exterior wall locations
- Iron and acrylic housing in a black finish
- SMD2835 LED strip engine with MeanWell driver
- UL certified and covered by a 3-year warranty

OVERVIEW

The L Series Linear Wall Sconce is a surface-mounted outdoor luminaire for building walls, entries and landscape perimeters. The iron and acrylic housing measures 94.48 × 1.96 × 1.57 in. and carries a black finish, with a removable bottom plate for hardwired mounting to an existing wall box.

The fixture draws 54 W and delivers 5400 lm from an internal SMD2835 LED strip assembly. Five field-selectable color temperatures cover 2700 K, 3000 K, 3500 K, 4000 K and 5000 K, and the IP65-rated waterproof enclosure suits exposed exterior locations. Operating voltage is 110-220 V through a MeanWell driver.

UL certified. Backed by a 3-year warranty.

SPECIFICATIONS

OPTICAL

Luminous Flux	5,400 lm
Efficacy	100 lm/W
Color Temperature	2,700K / 3,000K / 3,500K / 4,000K / 5,000K
Selectable CCT	Yes
LED Chip Type	SMD2835

MECHANICAL

Product Dimensions	94.48×1.96×1.57
Finish	Black
Material	Iron+Acrylic
Mounting	Surface-mounted wall

ORDERING

Warranty	3 y
----------	-----

ELECTRICAL


Operating Voltage	240 V
Wattage	10 W

ENVIRONMENTAL

IP Rating	IP65
Environmental Rating	Waterproof

DIMENSIONS & DIAGRAMS

- 1. Remove the small screws on both sides of the lamp, and separate the bottom plate and the lamp body.
- 2.Install and reset the bottom plate on the wall.
- 3.Connect the fire line.zero line and ground wire of the lamp body to the wire in the existing wall box. and must use the wiring cap or connect tape when the wire is connected.
- 4.Install the lamp body on the bottom plate and then install the lamp with screws.

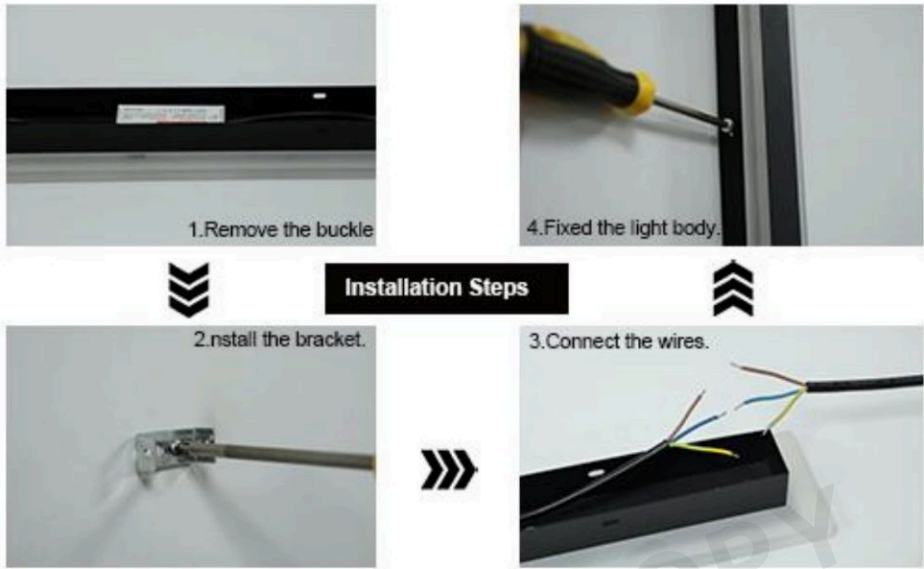

2

INSTALLATION

CERTIFICATIONS & COMPLIANCE



UL Listed

APPLICATIONS

- Building facades and exterior walls
- Hotel corridors and entry canopies
- Porches, patios and balconies
- Garden and courtyard walls
- Gate and front door surrounds

PROVENANCE — REVIEW COPY ONLY

slug	value	source	confidence
lumens	5,400 lm	db	high
efficacy_lm_per_w	100 lm/W	pdf	medium
cct_k	2,700K / 3,000K / 3,500K / 4,000K / 5,000K	both	high
cct_selectable	Yes	db	high
led_chip_type	SMD2835	pdf	high
operating_voltage	240 V	pdf	high
wattage	10 W	pdf	high
product_dimensions	94.48×1.96×1.57	db	high
finish	Black	db	high
material	Iron+Acrylic	db	high
mount_type	Surface-mounted wall	pdf	medium
ip_rating	IP65	both	high

slug	value	source	confidence
environmental_rating	Waterproof	db	high
warranty_years	3 y	pdf	high

Specifications subject to change without notice.

REVIEW COPY