


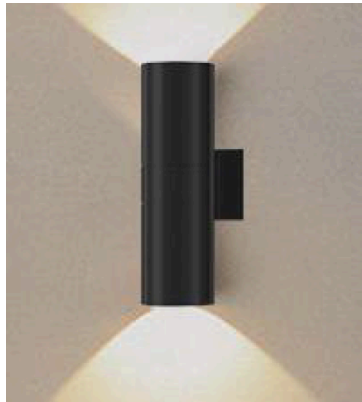

Cylinder Wall Sconce, 24W, 2000lm, 5CCT Tunable, IP65, Up/Down Light

- SMD3030 LED chips provide uniform up and down illumination
- Delivers 2000 lumens from a 24W input at 120-277V
- Field-selectable 5CCT tuning across 2700K to 5000K
- IP65 rated housing suited to exposed outdoor wall mounting
- Aluminum and steel construction with black finish
- Rated for 30,000-hour LED lifetime with 1-year warranty

OVERVIEW

The 1-W-R12x2-5CCT-BK is a 14-inch cylinder wall sconce designed for both up and down light distribution, suitable for indoor and outdoor commercial and residential applications. Its cylindrical profile and black finish make it a practical choice for building facades, entryways, and covered exterior corridors.

The fixture operates at AC 120-277V and delivers 24W of power with a luminous flux of 2000 lm and a CRI of 80 for reliable color rendering. The tunable 5CCT feature allows field selection among 2700K, 3000K, 3500K, 4000K and 5000K to match project requirements. An IP65 rating confirms protection against dust ingress and water jets, supporting use in exposed outdoor environments. The LED source is rated for 30,000 hours of operation and carries a 1-year warranty.

SPECIFICATIONS

OPTICAL

Luminous Flux	2,000 lm
Color Temperature	2,700K / 3,000K / 3,500K / 4,000K / 5,000K
CRI	80
LED Chip Type	SMD3030
LED Lifetime	30,000 h

MECHANICAL

Product Dimensions	4.16 × 2.66 × 14 in
Finish	Black
Material	Aluminum, Steel
Mounting	Wall mount

ORDERING

Warranty	1 y
----------	-----

ELECTRICAL

Operating Voltage	120-277 V
Wattage	24 W

ENVIRONMENTAL

IP Rating	IP65
-----------	------

APPLICATIONS

- Building facades
- Entryways and doorways
- Covered exterior corridors
- Patios and walkways
- Commercial storefronts

PROVENANCE — REVIEW COPY ONLY

slug	value	source	confidence
lumens	2,000 lm	db	high
cct_k	2,700K / 3,000K / 3,500K / 4,000K / 5,000K	db	high
cri	80	db	high
led_chip_type	SMD3030	db	high
led_lifetime_h	30,000 h	db	high
operating_voltage	120–277 V	db	high
wattage	24 W	db	high
product_dimensions	4.16 × 2.66 × 14 in	pdf	high
finish	Black	pdf	medium
material	Aluminum, Steel	pdf	high
mount_type	Wall mount	pdf	medium
ip_rating	IP65	pdf	high
warranty_years	1 y	db	high

Specifications subject to change without notice.

REVIEW COPY