


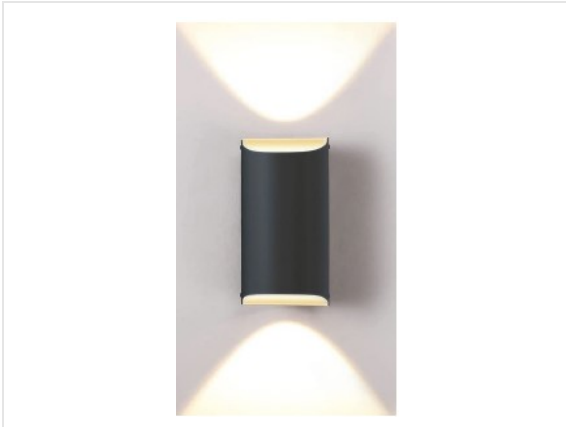

LED Wall Sconce, 24 W, 120-277 V AC, Five Selectable CCTs, IP65, ETL Listed

- 24 W total draw from two 12 W LED modules
- Five field-selectable CCTs from 2700 K to 5000 K
- SMD 3030 emitters rated for 30,000 hours of service
- 110-degree beam spread with CRI 80 rendering
- IP65-rated aluminum and steel housing in black
- 120-277 V AC input, ETL listed and FCC compliant

OVERVIEW

This 10-inch semi-round LED wall fixture is a surface-mounted sconce built for building entries, walkways and other exterior wall locations, and is suitable for interior use as well. Construction combines aluminum and steel with a black finish. The item is discontinued and stocked for replacement of existing installations only.

The fixture draws 24 W across two 12 W LED modules using SMD 3030 emitters, distributes light through a 110-degree beam spread, and renders at CRI 80. Color temperature is selectable at 2700 K, 3000 K, 3500 K, 4000 K or 5000 K. Input accepts 120-277 V AC, and the IP65 housing resists dust and water ingress. Rated LED life is 30,000 hours.

ETL listed and FCC compliant, backed by a three-year warranty.

SPECIFICATIONS

OPTICAL

Luminous Flux	600 lm
Color Temperature	2,700K / 3,000K / 3,500K / 4,000K / 5,000K
CRI	80
Beam Angle	110°
LED Chip Type	SMD 3030
LED Lifetime	30,000 h

MECHANICAL

Product Dimensions	122*11.5mm
Finish	Black
Material	Aluminum and steel
Mounting	Wall surface mount
Weight	19.84 lb

ORDERING

Warranty	3 y
----------	-----

ELECTRICAL

Operating Voltage	100-120 V
Wattage	10 W

ENVIRONMENTAL

IP Rating	IP65
-----------	------

DIMENSIONS & DIAGRAMS

Input Voltage:	100-120V AC, 50/60HZ	Cutout Size	Φ108mm
Lumen	600LM	Dimming	APP dimming 1-100%
Halogen Equivalent	60W	Approved Locations	Insulated ceilings
Efficiency	60LM/W	Air Tight	Yes
CRI	>80Ra	Certification	ETL , cETL
Color Temperature	RGBCW	Warranty	3 years
LED CHIP	SMD2835 +3030RGB	Beam Angle	110°
Damp Locations	Yes	Junction Box	included
Qty/ Ctn	20pcs	IC Rate	Yes
Gross Weight	9.0KG	Carton Size	35*28*28CM

DIMENSION

CERTIFICATIONS & COMPLIANCE

ETL

ETL Listed

FCC

FCC

APPLICATIONS

- Building entrances and vestibules
- Exterior corridors and walkways
- Multifamily stairwell walls
- Garage and service door surrounds
- Perimeter wall lighting

PROVENANCE — REVIEW COPY ONLY

slug	value	source	confidence
lumens	600 lm	pdf	high
cct_k	2,700K / 3,000K / 3,500K / 4,000K / 5,000K	both	high
cri	80	db	high
beam_angle_deg	110°	pdf	high
led_chip_type	SMD 3030	db	high
led_lifetime_h	30,000 h	db	high
operating_voltage	100–120 V	pdf	high
wattage	10 W	pdf	high
product_dimensions	122*11.5mm	pdf	high
finish	Black	pdf	medium
material	Aluminum and steel	pdf	high
mount_type	Wall surface mount	pdf	medium
weight	19.84 lb	pdf	high
ip_rating	IP65	db	high
warranty_years	3 y	db	high

Specifications subject to change without notice.