


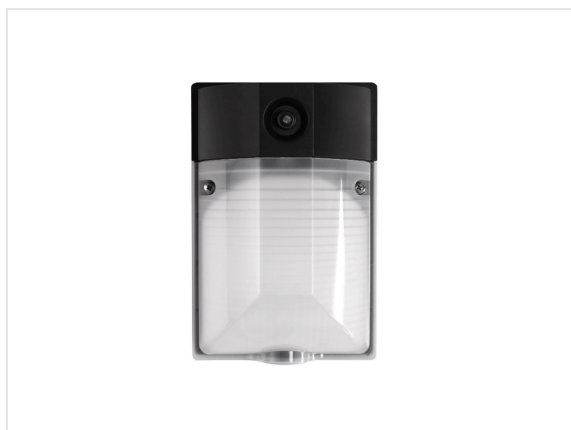

13W LED Mini Wallpack with Photocell, Frosted Cover, 5000K, 1500lm

- 13W draw replaces 75W MH or HID wallpack loads
- 1,500 lumens at 5000K, 70 CRI minimum
- 115 lm/W efficacy with 50,000-hour rated lifetime
- 120-277VAC, 50/60Hz input with power factor above 0.9
- IP65 construction qualified from -40 °C to +50 °C ambient
- Integrated dusk-to-dawn photocell and frosted acrylic lens

OVERVIEW

The LUMIPRO Mini Series 13W LED wallpack is a compact wall-mounted luminaire for exterior building illumination at doorways, pathways and service entries in commercial and light industrial facilities. The frosted acrylic cover spreads light evenly across the wall plane, and the integrated dusk-to-dawn photocell automates switching without external controls.

The fixture draws 13W and delivers 1,500 lumens at 5000K with 70 CRI and 115 lm/W efficacy, using Philips Lumileds SMD3030 emitters rated for 50,000 hours. Input is 120-277VAC, 50/60Hz, and the housing is qualified for ambient temperatures from -40 °C to +50 °C with an IP65 rating suitable for wet locations. Exterior parts carry a thermoset powder coat finish at a minimum 3 mils thickness.

RoHS compliant. Sold as a final-sale item with a limited 30-day warranty in place of the standard five-year luminaire and component coverage.

SPECIFICATIONS

OPTICAL

Luminous Flux	1,500 lm
Efficacy	115 lm/W
Color Temperature	5,000 K
CRI	70
LED Chip Type	Philips Lumileds SMD3030
LED Lifetime	50,000 h
Lens Type	Acrylic

ELECTRICAL

Operating Voltage	120-277 V
Wattage	75 W
Current Draw	0.11 A

MECHANICAL

Product Dimensions	5.5 × 3.75 × 8.5 ft
Finish	Super Durable thermoset powder coat, minimum 3 mils
Material	Precision-molded acrylic lens
Mounting	Wall mount
Weight	1.8 lb

ORDERING

Warranty	5 y
----------	-----

CERTIFICATIONS & COMPLIANCE

RoHS

RoHS Compliant

APPLICATIONS

- Building entries and doorways
- Exterior pathways and walkways
- Loading docks and service corridors
- Parking area perimeter walls
- Light industrial building exteriors

PROVENANCE — REVIEW COPY ONLY

slug	value	source	confidence
lumens	1,500 lm	db	high
efficacy_lm_per_w	115 lm/W	db	high
cct_k	5,000 K	db	high
cri	70	db	high
led_chip_type	Philips Lumileds SMD3030	pdf	high
led_lifetime_h	50,000 h	db	high
lens_type	Acrylic	db	high
operating_voltage	120–277 V	pdf	high
wattage	75 W	pdf	high
current_draw	0.11 A	pdf	medium
product_dimensions	5.5 × 3.75 × 8.5 ft	db	high
finish	Super Durable thermoset powder coat, minimum 3 mils	pdf	high
material	Precision-molded acrylic lens	pdf	high
mount_type	Wall mount	pdf	high
weight	1.8 lb	db	high
ip_rating	IP65	pdf	high
environmental_rating	Suitable for wet locations	pdf	high
ambient_temp_c	-40–50 °C	db	high
warranty_years	5 y	db	high

Specifications subject to change without notice.