


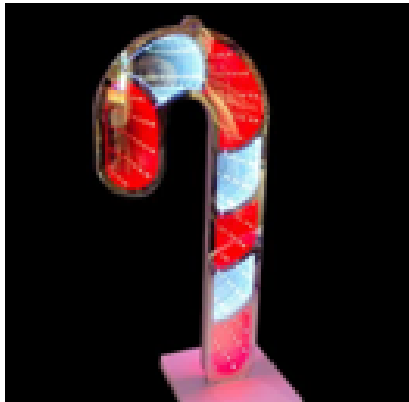

Christmas Candy Neon Sign, Mirror Acrylic and PVC Backboard, IP44, 12 V DC, 100 x 48 cm

- Mirror acrylic and PVC backboard with 4 mm FPC neon tubing
- IP44 protection class for indoor and outdoor placement
- 12 V DC operation from a 100-240 V AC power adapter
- 100 × 48 cm sign face at 1 kg product weight
- Rated -20 °C to +40 °C, 10-90% RH non-condensing
- Anti-vibration performance rated 50 Hz at 1 g acceleration

OVERVIEW

A candy-motif LED neon Christmas sign built on a mirror acrylic and PVC backboard with 4 mm FPC flexible neon tubing. The 100 × 48 cm panel weighs 1 kg and suits commercial advertising displays, interior decoration in bars, cafes and homes, seasonal event staging and brand logo display.

The sign runs on 12 V DC supplied by an adapter accepting 100-240 V AC input. Luminous colors include red, yellow, blue, green, white and golden. The IP44 protection class permits indoor and outdoor placement, with an operating range of -20 °C to +40 °C and 10-90% relative humidity, non-condensing. Anti-vibration performance is rated at 50 Hz, 1 g acceleration.

Warranty coverage is 2 years for indoor installations and 1 year for outdoor installations from the date of delivery.

SPECIFICATIONS

ELECTRICAL

Operating Voltage	100-240 V
Input Connection Type	100-240 V AC adapter with 12 V DC output

ENVIRONMENTAL

IP Rating	IP44
Environmental Rating	Indoor and outdoor
Ambient Operating Temperature	-20-40 °C -4-104 °F
Operating Humidity	10-90% RH, non-condensing

MECHANICAL

Product Dimensions	100*48CM
Strip Width	4 mm 0.16 in
Material	Mirror acrylic and PVC backboard, FPC neon tube
Weight	2.21 lb

ORDERING

Warranty *	2 indoor, 1 outdoor
------------	---------------------

APPLICATIONS

Retail storefront and window displays

Bar, cafe and restaurant interiors

Seasonal event and holiday staging

Hotel and office lobby brand displays

Covered exterior entry decoration

PROVENANCE — REVIEW COPY ONLY

slug	value	source	confidence
operating_voltage	100–240 V	pdf	high
input_connection_type	100–240 V AC adapter with 12 V DC output	pdf	high
product_dimensions	100*48CM	pdf	high
strip_width	4 mm	pdf	high
material	Mirror acrylic and PVC backboard, FPC neon tube	pdf	high
weight	2.21 lb	pdf	high
ip_rating	IP44	both	high
environmental_rating	Indoor and outdoor	pdf	high
ambient_temp_c	-20–40 °C	pdf	high
operating_humidity	10–90% RH, non-condensing	pdf	high
warranty_years	2 indoor, 1 outdoor	pdf	low

* Value inferred from source data; verify before specification.
Specifications subject to change without notice.

REVIEW COPY