


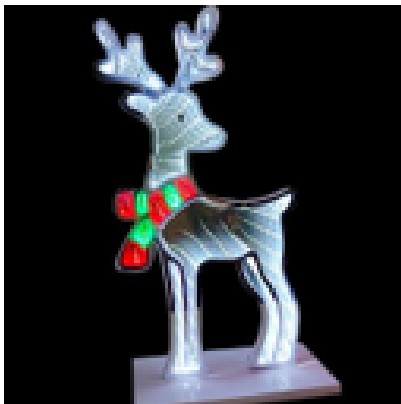

Christmas Deer Neon Sign, IP44, 12 V DC, 100 x 54 cm Mirror Acrylic and PVC Backboard

- IP44 protection class for indoor and outdoor placement
- Mirror acrylic face with PVC backboard, 100 × 54 cm
- DC 12 V operation from an AC 100-240 V adapter
- 4 mm FPC flexible neon tubing, double-sided illumination
- Operating range of -20 °C to +40 °C, 10-90% non-condensing
- 2-year indoor and 1-year outdoor warranty from delivery

OVERVIEW

The 6-CHSG-DEER is a double-sided 3D neon-style deer sign built on a mirror acrylic and PVC backboard, measuring 100 × 54 cm. It suits seasonal retail displays, hospitality interiors, event staging and brand or storefront decoration.

Illumination comes from 4 mm FPC flexible neon tubing operating at DC 12 V, supplied by a 12 V adapter accepting AC 100-240 V input. The IP44 enclosure rating permits indoor and outdoor placement, with an operating range of -20 °C to +40 °C and 10% to 90% non-condensing humidity. Unit weight is approximately 1 kg.

Warranty coverage is 2 years for indoor installation and 1 year for outdoor installation from the date of delivery.

SPECIFICATIONS

ELECTRICAL

Operating Voltage	100-240 V
Input Connection Type	AC 100-240 V input, 12 V DC adapter

ENVIRONMENTAL

IP Rating	IP44
Ambient Operating Temperature	-20-40 °C -4-104 °F
Operating Humidity	10-90% non-condensing

MECHANICAL

Product Dimensions	100*48CM
Strip Width	4 mm 0.16 in
Material	Mirror acrylic with PVC backboard, FPC neon tube
Weight	2.21 lb

ORDERING

Warranty *	2 y
------------	-----

APPLICATIONS

- Seasonal retail window displays
- Bar and cafe interior decor
- Event and holiday staging
- Storefront and brand signage
- Hotel lobby and lounge accents

slug	value	source	confidence
operating_voltage	100–240 V	pdf	high
input_connection_type	AC 100–240 V input, 12 V DC adapter	pdf	high
product_dimensions	100*48CM	pdf	high
strip_width	4 mm	pdf	high
material	Mirror acrylic with PVC backboard, FPC neon tube	pdf	high
weight	2.21 lb	pdf	high
ip_rating	IP44	both	high
ambient_temp_c	–20–40 °C	pdf	high
operating_humidity	10–90% non-condensing	pdf	high
warranty_years	2 y	pdf	low

* Value inferred from source data; verify before specification.
Specifications subject to change without notice.

REVIEW COPY