


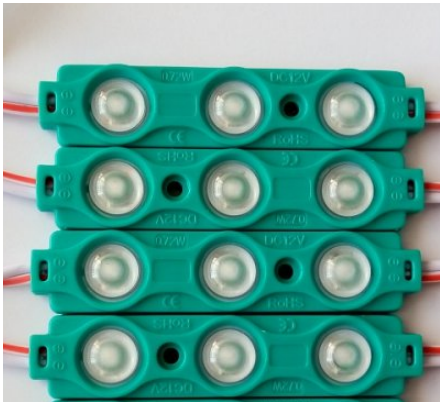

LED Sign Module, SMD5730 Green, 3-Dot, 12VDC 0.96W 110lm IP67, 20-Pack

- SMD5730 LED chip delivers 110 lumens at 0.96W per module
- 180° beam angle suited for wide-angle sign illumination
- IP67 rated for dust and temporary water immersion protection
- PVC housing rated for -30°C to 50°C ambient operation
- Rated LED lifetime of 50,000 hours
- CE and RoHS certified, 20-module set with 1-year warranty

OVERVIEW

The 7-57x3G is a 3-dot SMD5730 LED module designed for illuminated signage, channel letters, and architectural accent lighting. It produces green illumination and can be integrated into a wide range of sign and display lighting setups. This listing covers a set of 20 modules.

Each module operates at 12VDC and draws 0.96W, delivering 110 lumens with a 180° beam angle and a rated LED lifetime of 50,000 hours. The IP67 rating and PVC housing support use across an ambient temperature range of -30°C to 50°C, suiting both indoor and outdoor installations.

The module carries CE and RoHS certification and includes a 1-year warranty.

SPECIFICATIONS

OPTICAL

Luminous Flux	110 lm
Beam Angle	180°
LED Chip Type	SMD5730
LED Lifetime	50,000 h
Light Color	Green

MECHANICAL

Finish	Green
Material	PVC

ELECTRICAL

Operating Voltage	12 V
Wattage	0.96 W

ENVIRONMENTAL

IP Rating	IP67
Ambient Operating Temperature	-30-50 °C -22-122 °F

ORDERING

Warranty	1 y
----------	-----

CERTIFICATIONS & COMPLIANCE

CE

RoHS

CERoHS Compliant

APPLICATIONS

- Illuminated channel letters
- Storefront signage
- Architectural accent lighting
- Outdoor display backlighting
- Indoor sign box lighting

PROVENANCE — REVIEW COPY ONLY

slug	value	source	confidence
lumens	110 lm	db	high
beam_angle_deg	180°	db	high
led_chip_type	SMD5730	db	high
led_lifetime_h	50,000 h	db	high
color	Green	db	high
operating_voltage	12 V	db	high
wattage	0.96 W	db	high
finish	Green	db	high
material	PVC	db	high
ip_rating	IP67	db	high
ambient_temp_c	-30–50 °C	db	high
warranty_years	1 y	db	high

Specifications subject to change without notice.

REVIEW COPY