


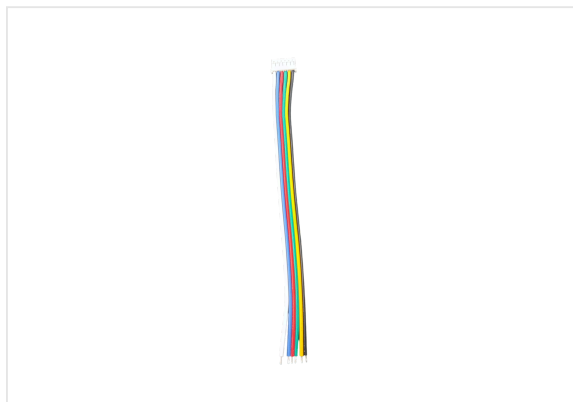

RGB CCT Single-End Wire-to-Sheet Connector for LED Sheet, 15cm, IP20

- Single-end wire-to-sheet configuration for RGB CCT LED sheets
- 15 cm lead length for wire routing within housings
- IP20 rated, non-waterproof design for dry indoor use
- Backed by a 2-year warranty
- Compatible LED sheet rated for 50,000 hour LED lifetime

OVERVIEW

The 7-FS9-CON-CA6-15CM is an RGB CCT single-end wire-to-sheet connector for use with compatible RGB CCT LED sheet products. It provides a termination point at one end of the LED sheet, connecting the wiring harness to the sheet for single-end feed configurations.

The connector has a 15 cm lead length, offering slack for routing wires within luminaire housings or mounting assemblies. It carries an IP20 rating and is classified as non-waterproof, suited for dry indoor installations. The associated LED sheet system is rated for a 50,000 hour LED lifetime.

The connector is backed by a 2-year warranty.

SPECIFICATIONS

OPTICAL

LED Lifetime 50,000 h

MECHANICAL

Product Dimensions 15 cm

ENVIRONMENTAL

IP Rating IP20

Environmental Rating Non-Waterproof

ORDERING

Warranty 2 y

APPLICATIONS

[Backlit stone panels](#)[Cabinetry and display lighting](#)[Architectural feature walls](#)[Indoor signage backlighting](#)

PROVENANCE — REVIEW COPY ONLY

slug	value	source	confidence
led_lifetime_h	50,000 h	db	high
product_dimensions	15 cm	db	high
ip_rating	IP20	db	high
environmental_rating	Non-Waterproof	db	high
warranty_years	2 y	db	high

Specifications subject to change without notice.