



Mini Cabinet Spot Light, 1 W 12 V DC, 3000 K, 120-Degree Beam, Black Aluminum

- 1 W draw on a 12 V DC supply for cabinet and casework circuits
- 3000 K warm white output at a 120-degree beam spread
- 6063 aluminum housing in a black finish
- 25 mm H x 20 mm W x 14 mm D body with 20 mm face diameter
- Installs into a 15 mm recessed mounting hole
- LED service life rated at 50,000 hours

OVERVIEW

Mini recessed spot light for cabinetry, casework and display millwork. The fixture body installs into a 15 mm recessed hole and connects to a 12 V DC supply, making it suitable for under-shelf accent lighting, retail vitrines and closet interiors.

The luminaire draws 1 W and emits at 3000 K through a 120-degree beam. Housing is 6063 aluminum in a black finish, measuring 25 mm high by 20 mm wide by 14 mm deep with a 20 mm face diameter and a 36 mm lead. LED service life is rated at 50,000 hours. The fixture is non-waterproof and intended for dry interior locations.

SPECIFICATIONS

OPTICAL

Color Temperature	3,000 K
Beam Angle	120°
LED Lifetime	50,000 h

MECHANICAL

Product Dimensions	20mm x 25mm
Finish	Black
Material	6063 aluminum
Mounting	Recessed, 15 mm hole

ELECTRICAL

Operating Voltage	12 V
Wattage	1 W
Wire Length	1.4 in


ENVIRONMENTAL

Environmental Rating	Non-Waterproof
----------------------	----------------

Light beam



30 or 120 degree

Product Photo:

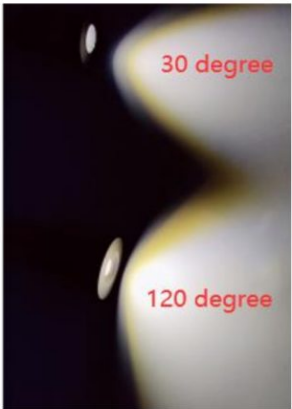

Install:

Recess 15mm hole, recess, connect to 12V DC

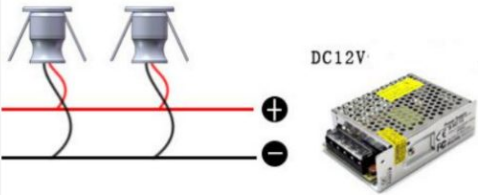

DIMENSION

APPLICATIONS

- Kitchen cabinet and under - shelf accent lighting
- Retail display cases and vitrines
- Closet and wardrobe interiors
- Millwork and casework detailing
- Reception desk and joinery accent lighting

PROVENANCE — REVIEW COPY ONLY

slug	value	source	confidence
cct_k	3,000 K	both	high
beam_angle_deg	120°	pdf	high

slug	value	source	confidence
led_lifetime_h	50,000 h	db	high
operating_voltage	12 V	pdf	high
wattage	1 W	pdf	high
wire_length	1.4 in	pdf	medium
product_dimensions	20mm x 25mm	pdf	high
finish	Black	db	high
material	6063 aluminum	pdf	high
mount_type	Recessed, 15 mm hole	pdf	high
environmental_rating	Non - Waterproof	db	high

Specifications subject to change without notice.

REVIEW COPY