



## LED Linear Hanging Light, 2 ft, 25 W, 3250 lm, Selectable 3000/4000/5000 K, Black

- 25 W input delivering 3250 lm at a 100-degree beam angle
- Field-selectable 3000 K, 4000 K or 5000 K output with CRI 80
- 0-10V dimming with 6.5 ft five-wire power feed cable included
- Aluminum heatsink body, black finish, IP20 non-waterproof
- ETL Listed and DLC qualified with a 5-year warranty
- Suspension kit, canopy and connection plate supplied

### OVERVIEW

A 2 ft direct/indirect linear pendant luminaire with separate up and down LED boards, intended for offices, retail floors, schools, galleries, grocery stores and other commercial interiors. A suspension kit, canopy and connection plate are included, and the fixture can also be surface or wall mounted with the appropriate clip. A wire harness connection kit allows power to be carried between linked fixtures.

The fixture draws 25 W at 120-277 V and produces 3250 lm across a 100-degree beam angle, with CRI 80 and power factor above 0.95. Color temperature is field selectable at 3000 K, 4000 K or 5000 K, and the top and bottom LEDs are switched separately. Standard distribution is 30 percent uplight and 70 percent downlight, with the top board able to be disconnected for full downlight. The aluminum heatsink body carries a black finish and holds over 70 percent lumen maintenance at 50,000 hours. Operating range is -20 to 40 degrees C, IP20.

ETL Listed and DLC qualified, backed by a 5-year warranty.

### SPECIFICATIONS

#### OPTICAL

|                   |                          |
|-------------------|--------------------------|
| Luminous Flux     | 3,250 lm                 |
| Efficacy          | 130 lm/W                 |
| Color Temperature | 3,000K / 4,000K / 5,000K |
| Selectable CCT    | Yes                      |
| CRI               | 80                       |
| Beam Angle        | 100°                     |
| LED Lifetime      | 50,000 h                 |

#### ELECTRICAL

|                   |           |
|-------------------|-----------|
| Operating Voltage | 120-277 V |
| Wattage           | 25 W      |
| Power Factor      | 0.95      |
| Dimmer Type       | 0 - 10V   |
| Wire Length       | 78 in     |

MECHANICAL

|                    |                        |
|--------------------|------------------------|
| Product Dimensions | 655X258X258mm          |
| Length             | 0.61 m<br>2.0 ft       |
| Finish             | Black                  |
| Material           | Aluminum heatsink body |
| Mounting           | Wall/Pole Mount        |
| Weight             | 18.76 lb               |

ORDERING


|          |     |
|----------|-----|
| Warranty | 5 y |
|----------|-----|

ENVIRONMENTAL


|                               |                  |
|-------------------------------|------------------|
| IP Rating                     | IP20             |
| Environmental Rating          | Non - Waterproof |
| Ambient Operating Temperature | -20 °C<br>-4 °F  |

REVIEW COPY

DIMENSIONS & DIAGRAMS

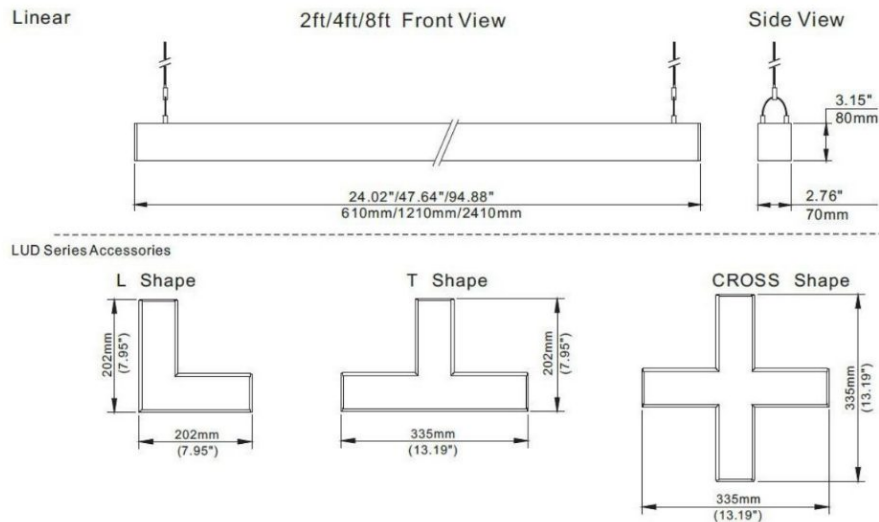

| Package Information |                                          |                                           |                                           |                                         |                                         |                                          |
|---------------------|------------------------------------------|-------------------------------------------|-------------------------------------------|-----------------------------------------|-----------------------------------------|------------------------------------------|
| Model. N            | 9-LH2-PS-3CCT-ETL-WT                     | 9-LH4-PS-3CCT-ETL-WT                      | 9-LH8-PS-3CCT-ETL-WT                      | 9-LH-CNT-L-WT                           | 9-LH-CNT-T-WT                           | 9-LH-CNT-X-WT                            |
| Size                | 2FT                                      | 4FT                                       | 8FT                                       | L Shape                                 | T Shape                                 | X/Cross Shape                            |
| QTY/PACK            | 4PCS/PACK                                |                                           |                                           | 12PCS/PACK                              | 6PCS/PACK                               |                                          |
| Package Size        | 655X258X258mm<br>25.79\"X10.16\"X10.16\" | 1255X258X258mm<br>49.41\"X10.16\"X10.16\" | 2455X258X258mm<br>96.65\"X10.16\"X10.16\" | 605X300X235mm<br>23.82\"X11.81\"X9.25\" | 600X360X235mm<br>23.62\"X14.17\"X9.25\" | 600X360X365mm<br>23.62\"X14.17\"X14.37\" |
| Package Weight      | 8.51 kg/18.74 lbs                        | 17.95 kg/39.57 lbs                        | 24.02 kg/52.91 lbs                        | 13.12 kg/28.89 lbs                      | 8.31 kg/18.3 lbs                        | 10.21 kg/22.49 lbs                       |
| Package CBM         | 0.043599                                 | 0.083538                                  | 0.163415                                  | 0.163415                                | 0.05076                                 | 0.07884                                  |
| 40GP Capacity       | -                                        | ~2770PCS                                  | ~1450PCS                                  | -                                       | -                                       | -                                        |
| 40HQ Capacity       | -                                        | ~3250PCS                                  | ~1660PCS                                  | -                                       | -                                       | -                                        |
| 45HQ Capacity       | -                                        | ~3730PCS                                  | ~1910PCS                                  | -                                       | -                                       | -                                        |

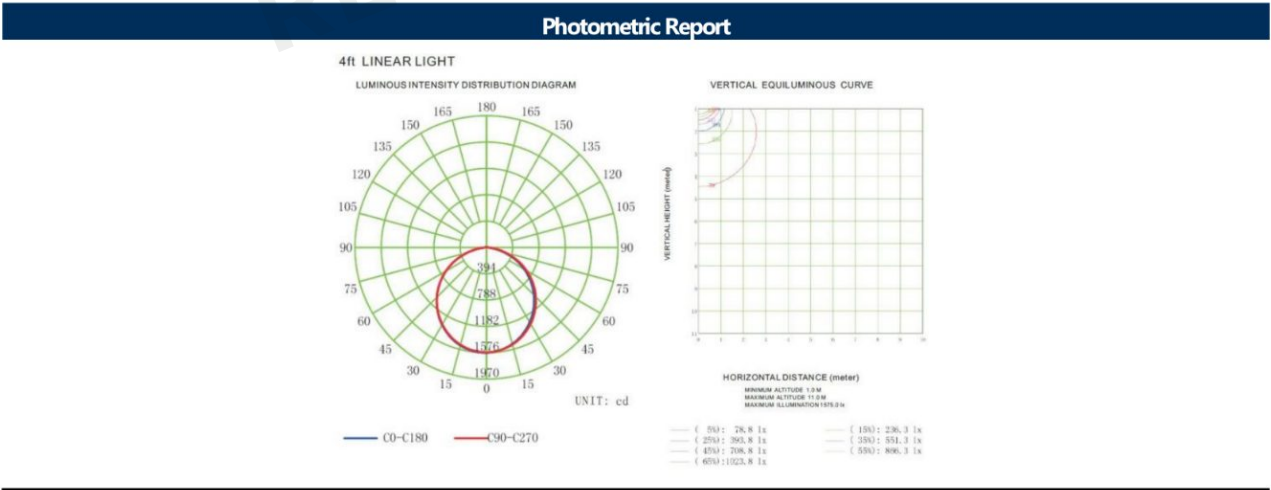

APPLICATIONS

- Open-plan office bays
- Retail sales floors
- School and institutional corridors
- Gallery and exhibition spaces
- Grocery and hospitality interiors

PROVENANCE — REVIEW COPY ONLY

| slug                 | value                    | source | confidence |
|----------------------|--------------------------|--------|------------|
| lumens               | 3,250 lm                 | both   | high       |
| efficacy_lm_per_w    | 130 lm/W                 | pdf    | medium     |
| cct_k                | 3,000K / 4,000K / 5,000K | both   | high       |
| cct_selectable       | Yes                      | db     | high       |
| cri                  | 80                       | db     | high       |
| beam_angle_deg       | 100°                     | pdf    | high       |
| led_lifetime_h       | 50,000 h                 | db     | high       |
| operating_voltage    | 120–277 V                | pdf    | high       |
| wattage              | 25 W                     | pdf    | high       |
| power_factor         | 0.95                     | db     | high       |
| dimmer_type          | 0 - 10V                  | db     | high       |
| wire_length          | 78 in                    | pdf    | medium     |
| product_dimensions   | 655X258X258mm            | pdf    | high       |
| length               | 0.61 m                   | pdf    | high       |
| finish               | Black                    | db     | high       |
| material             | Aluminum heatsink body   | pdf    | high       |
| mount_type           | Wall/Pole Mount          | db     | high       |
| weight               | 18.76 lb                 | pdf    | high       |
| ip_rating            | IP20                     | db     | high       |
| environmental_rating | Non-Waterproof           | db     | high       |
| ambient_temp_c       | -20 °C                   | db     | high       |
| warranty_years       | 5 y                      | db     | high       |

Specifications subject to change without notice.