


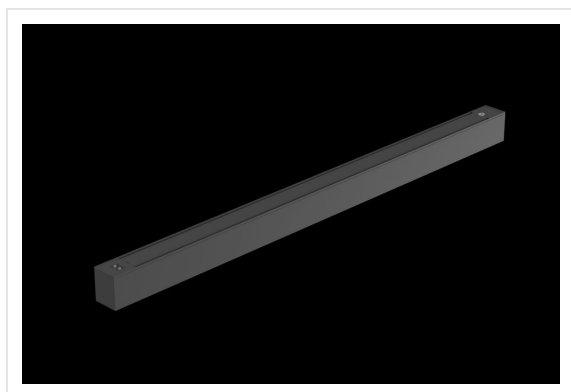

## LED Linear Architectural Fixture, 2 ft, 10/13/15 W Selectable, 3000-5000 K, 120-277 V, Black

- Selectable 10, 13 or 15 W output with 3000 K, 4000 K or 5000 K CCT
- 115 lm/W efficacy from SMD2835 LEDs with CRI above 80
- Isolated driver, 120-277 VAC input, power factor above 0.95
- Black RAL9011 aluminum housing, 600 × 60 × 75 mm, IP20
- UL and cUL listed, DLC 5.1 qualified
- Suspension, wall, surface or recessed mounting with 1.5 m cord

### OVERVIEW

A 2 ft architectural linear fixture in a black RAL9011 aluminum housing, measuring 600 × 60 × 75 mm and supplied with a 1.5 m cord. Suspension, wall, surface and recessed mounting are supported, along with T, + and L type quick-connect joints for continuous runs in offices, corridors, meeting rooms and galleries.

Field-selectable switches set output at 10, 13 or 15 W and correlated color temperature at 3000 K, 4000 K or 5000 K. Efficacy is 115 lm/W with CRI above 80 and a 110-degree beam from SMD2835 emitters. The isolated driver accepts 120-277 VAC, holds power factor above 0.95 for flicker-free operation, and is rated for -30 to 50 degrees C ambients with 50,000 hour LED life.

The fixture is UL and cUL listed and DLC 5.1 qualified.

### SPECIFICATIONS

#### OPTICAL

|                   |                          |
|-------------------|--------------------------|
| Luminous Flux     | 115 lm                   |
| Efficacy          | 115 lm/W                 |
| Color Temperature | 3,000K / 4,000K / 5,000K |
| CRI               | 80                       |
| Beam Angle        | 110°                     |
| LED Chip Type     | SMD2835                  |
| LED Lifetime      | 50,000 h                 |
| Light Color       | White                    |

#### ELECTRICAL

|                   |           |
|-------------------|-----------|
| Operating Voltage | 120-277 V |
| Wattage           | 20 W      |
| Wire Length       | 59 in     |

MECHANICAL

|                    |                                          |
|--------------------|------------------------------------------|
| Product Dimensions | 600 × 60 × 75 mm                         |
| Length             | 0.6 m<br>2.0 ft                          |
| Finish             | Black                                    |
| Material           | Aluminum                                 |
| Mounting           | Suspension, wall, surface<br>or recessed |

ORDERING

|          |     |
|----------|-----|
| Warranty | 1 y |
|----------|-----|

ENVIRONMENTAL

|                               |                         |
|-------------------------------|-------------------------|
| IP Rating                     | IP20                    |
| Ambient Operating Temperature | -30–50 °C<br>-22–122 °F |

CERTIFICATIONS & COMPLIANCE

UL

UL Listed

DLC

DesignLights Consortium

APPLICATIONS

- Open-plan offices
- Corridors and circulation spaces
- Conference and meeting rooms
- Galleries and showrooms
- Retail sales floors

PROVENANCE — REVIEW COPY ONLY

| slug               | value                                 | source | confidence |
|--------------------|---------------------------------------|--------|------------|
| lumens             | 115 lm                                | pdf    | high       |
| efficacy_lm_per_w  | 115 lm/W                              | db     | high       |
| cct_k              | 3,000K / 4,000K / 5,000K              | both   | high       |
| cri                | 80                                    | db     | high       |
| beam_angle_deg     | 110°                                  | db     | high       |
| led_chip_type      | SMD2835                               | db     | high       |
| led_lifetime_h     | 50,000 h                              | db     | high       |
| color              | White                                 | db     | high       |
| operating_voltage  | 120–277 V                             | pdf    | high       |
| wattage            | 20 W                                  | pdf    | high       |
| wire_length        | 59 in                                 | pdf    | medium     |
| product_dimensions | 600 × 60 × 75 mm                      | pdf    | high       |
| length             | 0.6 m                                 | pdf    | high       |
| finish             | Black                                 | db     | high       |
| material           | Aluminum                              | db     | high       |
| mount_type         | Suspension, wall, surface or recessed | pdf    | high       |
| ip_rating          | IP20                                  | db     | high       |
| ambient_temp_c     | -30–50 °C                             | db     | high       |
| warranty_years     | 1 y                                   | db     | high       |

Specifications subject to change without notice.