


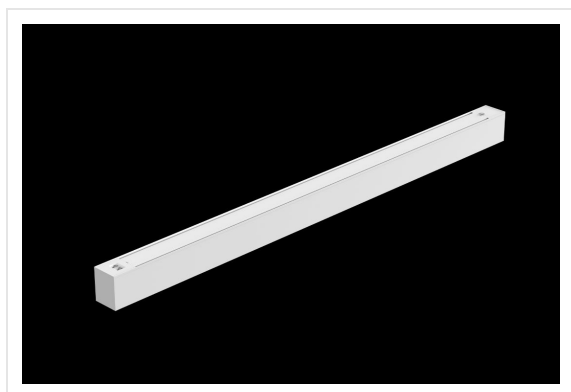

Architectural Linear Fixture, 2 ft, 15 W Selectable Output, 3000/4000/5000 K, 120-277 V

- Field-selectable 3000 K, 4000 K and 5000 K color temperature
- 115 lm/W efficacy with SMD2835 LEDs rated for 50,000 hours
- Isolated flicker-free driver with power factor above 0.95
- UL and DLC listed for utility rebate qualification
- Extruded aluminum housing in white with 110-degree distribution
- Suspension, wall, surface and recessed mounting from one housing

OVERVIEW

A 2 ft surface, suspended, wall or recessed linear fixture in a white aluminum housing, sized 600 × 60 × 75 mm. Field-selectable wattage and color temperature suit offices, corridors, meeting rooms and galleries where one model must cover several lighting schedules.

Output reaches 15 W at 115 lm/W using SMD2835 LEDs, with selectable 3000 K, 4000 K and 5000 K settings, CRI of 80 and a 110-degree beam spread. The isolated flicker-free driver accepts 120-277 VAC, power factor is above 0.95, and rated LED life is 50,000 hours. Ambient operating range is -30 to 50 degrees C at IP20. A 1.5 m cord is supplied.

UL and DLC listed, backed by a 1-year warranty.

SPECIFICATIONS

OPTICAL

Luminous Flux	115 lm
Efficacy	115 lm/W
Color Temperature	3,000K / 4,000K / 5,000K
CRI	80
Beam Angle	110°
LED Chip Type	SMD2835
LED Lifetime	50,000 h
Light Color	White

MECHANICAL

Product Dimensions	600 × 60 × 75 mm
Finish	White
Material	Aluminum
Mounting	Suspended, wall, surface or recessed

ELECTRICAL

Operating Voltage	120-277 V
Wattage	20 W
Wire Length	59 in

ENVIRONMENTAL

IP Rating	IP20
Ambient Operating Temperature	-30-50 °C -22-122 °F

ORDERING

Warranty

1 y

CERTIFICATIONS & COMPLIANCE



UL Listed



DesignLights Consortium

APPLICATIONS

- Open-plan offices
- Corridors and circulation spaces
- Conference and meeting rooms
- Galleries and exhibition spaces
- Retail sales floors

PROVENANCE — REVIEW COPY ONLY

slug	value	source	confidence
lumens	115 lm	pdf	high
efficacy_lm_per_w	115 lm/W	db	high
cct_k	3,000K / 4,000K / 5,000K	both	high
cri	80	db	high
beam_angle_deg	110°	db	high
led_chip_type	SMD2835	db	high
led_lifetime_h	50,000 h	db	high
color	White	db	high
operating_voltage	120–277 V	pdf	high
wattage	20 W	pdf	high
wire_length	59 in	pdf	medium
product_dimensions	600 × 60 × 75 mm	pdf	high
finish	White	db	high
material	Aluminum	db	high
mount_type	Suspended, wall, surface or recessed	pdf	high
ip_rating	IP20	db	high
ambient_temp_c	–30–50 °C	db	high
warranty_years	1 y	db	high

Specifications subject to change without notice.