


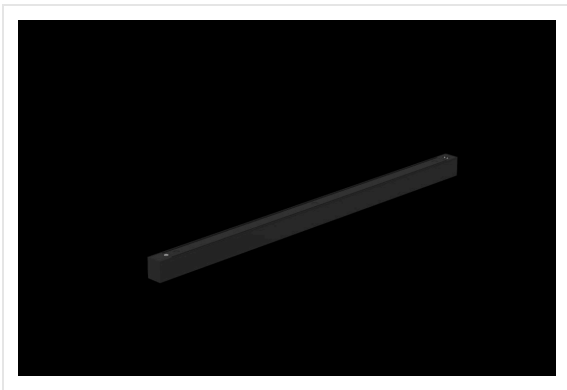

Architectural Linear Fixture, 2 ft, 15 - 25 W Selectable, 4 - CCT 3000-5000 K, 0 - 10 V Dim, Black

- Field-selectable 15, 20 or 25 W with 3000-5000 K CCT switching
- Up to 1620 lm output at 115 lm/W efficacy and CRI 80
- 0-10 V dimming through a flicker-free driver, power factor 0.95
- Extruded 6063 aluminum housing in black powder-coated finish
- SMD2835 LEDs rated 50,000 hours at L80B20
- UL, FCC and DLC listed with a 5-year warranty

OVERVIEW

A 2 ft direct/indirect architectural linear luminaire measuring 604 × 59 × 73 mm, built on a precision-cut extruded 6063 aluminum housing with a black powder-coated finish and screwless die-cast end caps. Pendant, surface, wall and recessed mounting are supported, and L, T, X and V transition pieces allow continuous runs.

Wattage is field-selectable at 15, 20 or 25 W with CCT selectable at 3000 K, 3500 K, 4000 K or 5000 K, delivering up to 1620 lm per foot at 115 lm/W and CRI 80 across a 120-degree beam. The flicker-free Class 2 driver accepts 120-347 V AC at 50/60 Hz, holds a power factor of 0.95 and dims via 0-10 V. Rated IP20 for dry and damp interior use from -25 to 40 degrees C, with an L80 lifetime of 50,000 hours.

UL, FCC and DLC listed, with a 5-year warranty.

SPECIFICATIONS

OPTICAL

Luminous Flux	1,620 lm
Efficacy	115 lm/W
Color Temperature	3,000K / 3,500K / 4,000K / 5,000K
Selectable CCT	Yes
CRI	80
Beam Angle	120°
LED Chip Type	SMD2835
LED Lifetime	50,000 h

ELECTRICAL

Operating Voltage	120-347 V
Wattage	0.5 W
Power Factor	0.95
Dimmer Type	0 - 10V
Driver	Flicker Free
Wire Length	59 in

MECHANICAL

Product Dimensions	604×59×73mm
Finish	Black
Material	Aluminum
Mounting	Wall/Pole Mount
Weight	3.31 lb

ORDERING

Warranty	5 y
----------	-----

ENVIRONMENTAL

IP Rating	IP20
Environmental Rating	Non - Waterproof
Ambient Operating Temperature	-25-40 °C -13-104 °F
Operating Humidity	10%-90% RH

DIMENSIONS & DIAGRAMS

- DLC Premium, up to 1620LM/FT
- Direct and indirect lighting settings 70% direct / 30% indirect

Corners:

- Corners and other transition pieces are fully luminous
- Uses Male/Female connector to quickly connect power from the last fixture. L, T, X, Y (120°) corners are also available.

Finish:

- All painted surfaces are premium powder coated baked on for maximum durability and color stability
- W: White (RAL 9016); Black (RAL 9011); Silver (RAL 9006)

WIRING

CERTIFICATIONS & COMPLIANCE

UL

UL Listed

DLC

DesignLights Consortium

FCC

FCC

APPLICATIONS

Open-plan office ceilings

Retail and showroom interiors

School classrooms and corridors

Commercial lobbies and reception areas

Conference and training rooms

PROVENANCE — REVIEW COPY ONLY

slug	value	source	confidence
lumens	1,620 lm	both	high
efficacy_lm_per_w	115 lm/W	db	high
cct_k	3,000K / 3,500K / 4,000K / 5,000K	both	high
cct_selectable	Yes	db	high
cri	80	db	high
beam_angle_deg	120°	both	high
led_chip_type	SMD2835	db	high
led_lifetime_h	50,000 h	pdf	high
operating_voltage	120-347 V	pdf	high
wattage	0.5 W	pdf	high
power_factor	0.95	db	high
dimmer_type	0 - 10V	db	high
driver	Flicker Free	db	high
wire_length	59 in	pdf	medium
product_dimensions	604×59×73mm	db	high
finish	Black	db	high
material	Aluminum	db	high
mount_type	Wall/Pole Mount	db	high
weight	3.31 lb	pdf	high

slug	value	source	confidence
ip_rating	IP20	both	high
environmental_rating	Non - Waterproof	db	high
ambient_temp_c	- 25~40 °C	db	high
operating_humidity	10% - 90% RH	pdf	high
warranty_years	5 y	both	high

Specifications subject to change without notice.

REVIEW COPY