


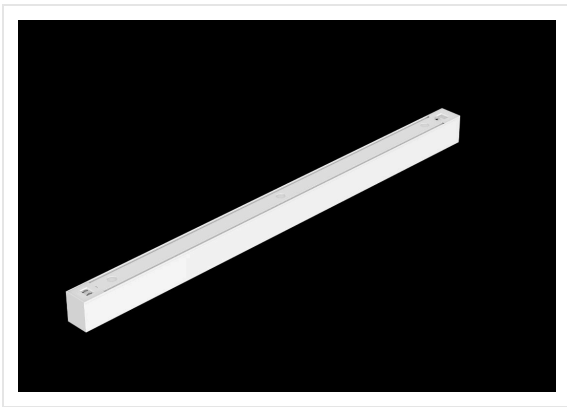

Architectural Linear Fixture, 2 ft, 15 - 25 W Selectable, 3000-5000 K 4-CCT, 0-10V Dimming

- Selectable 15, 20 or 25 W with 3000-5000 K field-set CCT
- Up to 1620 lm per foot at 115 lm/W efficacy, 80 CRI
- Flicker-free driver with 0-10V dimming, 0.95 power factor
- Extruded aluminum housing, white finish, 604 × 59 × 73 mm
- SMD2835 LEDs rated 50,000 hours, 120-degree beam angle
- UL, FCC and DLC 5.1 listed with 5-year warranty

OVERVIEW

A 2 ft direct/indirect architectural linear luminaire in an extruded 6063 aluminum housing with a white RAL 9016 powder-coated finish and die-cast end caps. Measuring 604 × 59 × 73 mm, it suits open-ceiling offices, corridors, retail interiors and continuous-run layouts using suspended, surface, wall or recessed mounting.

Field-selectable output covers 15, 20 and 25 W with selectable 3000 K, 3500 K, 4000 K and 5000 K color temperatures at 80 CRI and 115 lm/W, producing up to 1620 lumens per foot through a 120-degree distribution. SMD2835 LEDs and a flicker-free 0-10V dimming driver operate on 120-347 VAC with a 0.95 power factor and a rated life of 50,000 hours. IP20, for dry interior use from -20 to 40 degrees C.

Listed to UL, FCC and DLC 5.1, with a 5-year warranty.

SPECIFICATIONS

OPTICAL

Luminous Flux	1,620 lm
Efficacy	115 lm/W
Color Temperature	3,000K / 3,500K / 4,000K / 5,000K
Selectable CCT	Yes
CRI	80
Beam Angle	120°
LED Chip Type	SMD2835
LED Lifetime	50,000 h

ELECTRICAL

Operating Voltage	120-347 V
Wattage	0.5 W
Power Factor	0.95
Dimmer Type	0 - 10V
Driver	Flicker Free

MECHANICAL

Product Dimensions	604×59×73mm
Finish	White
Material	Aluminum
Mounting	Wall/Pole Mount
Weight	3.31 lb

ORDERING

Warranty	5 y
----------	-----

ENVIRONMENTAL

IP Rating	IP20
Environmental Rating	Non - Waterproof
Ambient Operating Temperature	-20-40 °C -4-104 °F
Operating Humidity	10%-90% RH

DIMENSIONS & DIAGRAMS

- DLC Premium, up to 1620LM/FT
- Direct and indirect lighting settings 70% direct / 30% indirect

Corners:

- Corners and other transition pieces are fully luminous
- Uses Male/Female connector to quickly connect power from the last fixture. L, T, X, Y, V (120°) corners are also available.

Finish:

- All painted surfaces are premium powder coated baked on for maximum durability and color stability
- W: White (RAL 9016); Black (RAL 9011); Silver (RAL 9006)

WIRING

CERTIFICATIONS & COMPLIANCE

UL

UL Listed

DLC

DesignLights Consortium

FCC

FCC

APPLICATIONS

Open-plan office ceilings

Corridors and lobbies

Retail sales floors

Educational and institutional interiors

Continuous-run architectural coves

PROVENANCE — REVIEW COPY ONLY

slug	value	source	confidence
lumens	1,620 lm	pdf	high
efficacy_lm_per_w	115 lm/W	db	high
cct_k	3,000K / 3,500K / 4,000K / 5,000K	both	high
cct_selectable	Yes	db	high
cri	80	db	high
beam_angle_deg	120°	both	high
led_chip_type	SMD2835	db	high
led_lifetime_h	50,000 h	pdf	high
operating_voltage	120-347 V	pdf	high
wattage	0.5 W	pdf	high
power_factor	0.95	db	high
dimmer_type	0 - 10V	db	high
driver	Flicker Free	db	high
product_dimensions	604×59×73mm	db	high
finish	White	db	high
material	Aluminum	db	high
mount_type	Wall/Pole Mount	db	high
weight	3.31 lb	pdf	high
ip_rating	IP20	both	high

slug	value	source	confidence
environmental_rating	Non - Waterproof	db	high
ambient_temp_c	- 20~40 °C	db	high
operating_humidity	10% - 90% RH	pdf	high
warranty_years	5 y	both	high

Specifications subject to change without notice.

REVIEW COPY