


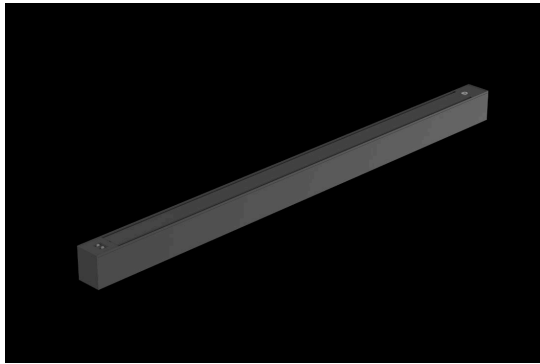

Architectural LED Linear Fixture, 4 ft, 20/24/30 W Selectable, 3000-5000 K, 120-277 V, Black

- Selectable 20 W, 24 W or 30 W output from a single SKU
- Field-selectable 3000 K, 4000 K or 5000 K color temperature
- 115 lm/W efficacy with CRI above 80 and 120 degree distribution
- 0-10 V dimming with isolated, flicker-free driver
- Extruded aluminum housing in black RAL9011 finish
- UL and FCC listed, file number E517323, 5-year warranty

OVERVIEW

A 4 ft architectural linear luminaire in a black aluminum housing, intended for offices, corridors, meeting rooms and galleries. Suspension, wall, surface and recessed mounting are supported, and buckle joints with fast connectors allow T, L and cross run configurations.

Field-selectable switches set output at 20 W, 24 W or 30 W and correlated color temperature at 3000 K, 4000 K or 5000 K. The fixture delivers 115 lm/W at CRI 80 with a 120 degree distribution, operates on 120-277 VAC with a power factor above 0.9, and dims via a 0-10 V control signal. SMD2835 emitters are rated for 50,000 hours, and the isolated driver supports operation down to -25 C.

UL and FCC listed under file number E517323, IP20, and covered by a 5-year warranty.

SPECIFICATIONS

OPTICAL

Luminous Flux	115 lm
Efficacy	115 lm/W
Color Temperature	3,000K / 4,000K / 5,000K
Selectable CCT	Yes
CRI	80
Beam Angle	120°
LED Chip Type	SMD2835
LED Lifetime	50,000 h
Light Color	White

ELECTRICAL

Operating Voltage	120-277 V
Wattage	20 W
Power Factor	0.9
Dimmer Type	0 - 10V
Wire Length	59 in

MECHANICAL		ENVIRONMENTAL	
Product Dimensions	4 ft	IP Rating	IP20
Finish	Black	Environmental Rating	Non - Waterproof
Material	Aluminum	Ambient Operating Temperature	- 25 °C - 13 °F
Mounting	Suspended, wall, surface or recessed		
COMPLIANCE		ORDERING	
UL File Number	E517323	Warranty	5 y

CERTIFICATIONS & COMPLIANCE

UL

UL Listed
E517323

FCC

FCC

APPLICATIONS

- Open - plan offices
- Corridors and circulation spaces
- Conference and meeting rooms
- Gallery and retail display areas
- Educational classrooms

PROVENANCE — REVIEW COPY ONLY

slug	value	source	confidence
lumens	115 lm	pdf	high
efficacy_lm_per_w	115 lm/W	db	high
cct_k	3,000K / 4,000K / 5,000K	both	high
cct_selectable	Yes	db	high
cri	80	db	high
beam_angle_deg	120°	db	high
led_chip_type	SMD2835	db	high
led_lifetime_h	50,000 h	db	high
color	White	db	high
operating_voltage	120–277 V	pdf	high
wattage	20 W	pdf	high
power_factor	0.9	db	high
dimmer_type	0 - 10V	db	high
wire_length	59 in	pdf	medium
product_dimensions	4 ft	db	high
finish	Black	db	high
material	Aluminum	db	high
mount_type	Suspended, wall, surface or recessed	pdf	high
ip_rating	IP20	db	high
environmental_rating	Non - Waterproof	db	high
ambient_temp_c	- 25 °C	db	high
ul_file_number	E517323	db	high
warranty_years	5 y	db	high

Specifications subject to change without notice.