



LED Linear Architectural Fixture, 4 ft, 30 W, selectable 3000/4000/5000 K, 120-240 V AC, White

- Field-selectable 3000 K, 4000 K or 5000 K color temperature
- 30 W input with 115 lm/W efficacy from SMD2835 emitters
- Aluminum frame with PC diffuser in white finish
- Isolated flicker-free driver with power factor above 0.95
- UL listed and DLC qualified for utility rebate programs
- 110-degree beam angle with CRI above 80 and 50,000-hour rated life

OVERVIEW

This architectural linear fixture measures 1200 × 60 × 75 mm and is built on an extruded aluminum frame with a white finish and a PC diffuser. Suspension, wall, recessed and surface mounting are supported, and mounting brackets remain concealed after installation for continuous runs in offices, corridors and retail interiors.

The fixture draws 30 W at 120-240 V AC and delivers 115 lm/W using SMD2835 emitters, with a 110-degree beam distribution, CRI above 80 and field-selectable 3000 K, 4000 K or 5000 K output. The isolated, flicker-free driver holds a power factor above 0.95. Rated life is 50,000 hours, with an IP20 indoor rating and an ambient range of -30 to 50 degrees C.

UL listed and DLC qualified, backed by a one-year warranty.

SPECIFICATIONS

OPTICAL

Luminous Flux	115 lm
Efficacy	115 lm/W
Color Temperature	3,000K / 4,000K / 5,000K
CRI	80
Beam Angle	110°
LED Chip Type	SMD2835
LED Lifetime	50,000 h
Light Color	White

MECHANICAL

Product Dimensions	1200 × 60 × 75 mm
Finish	White
Material	Aluminum
Mounting	Suspended, wall, recessed or surface

ORDERING


Warranty	1 y
----------	-----

ELECTRICAL

Operating Voltage	120-277 V
Wattage	50 W
Wire Length	59 in

ENVIRONMENTAL

IP Rating	IP20
Ambient Operating Temperature	-30-50 °C -22-122 °F
Operating Humidity	10%-90% RH

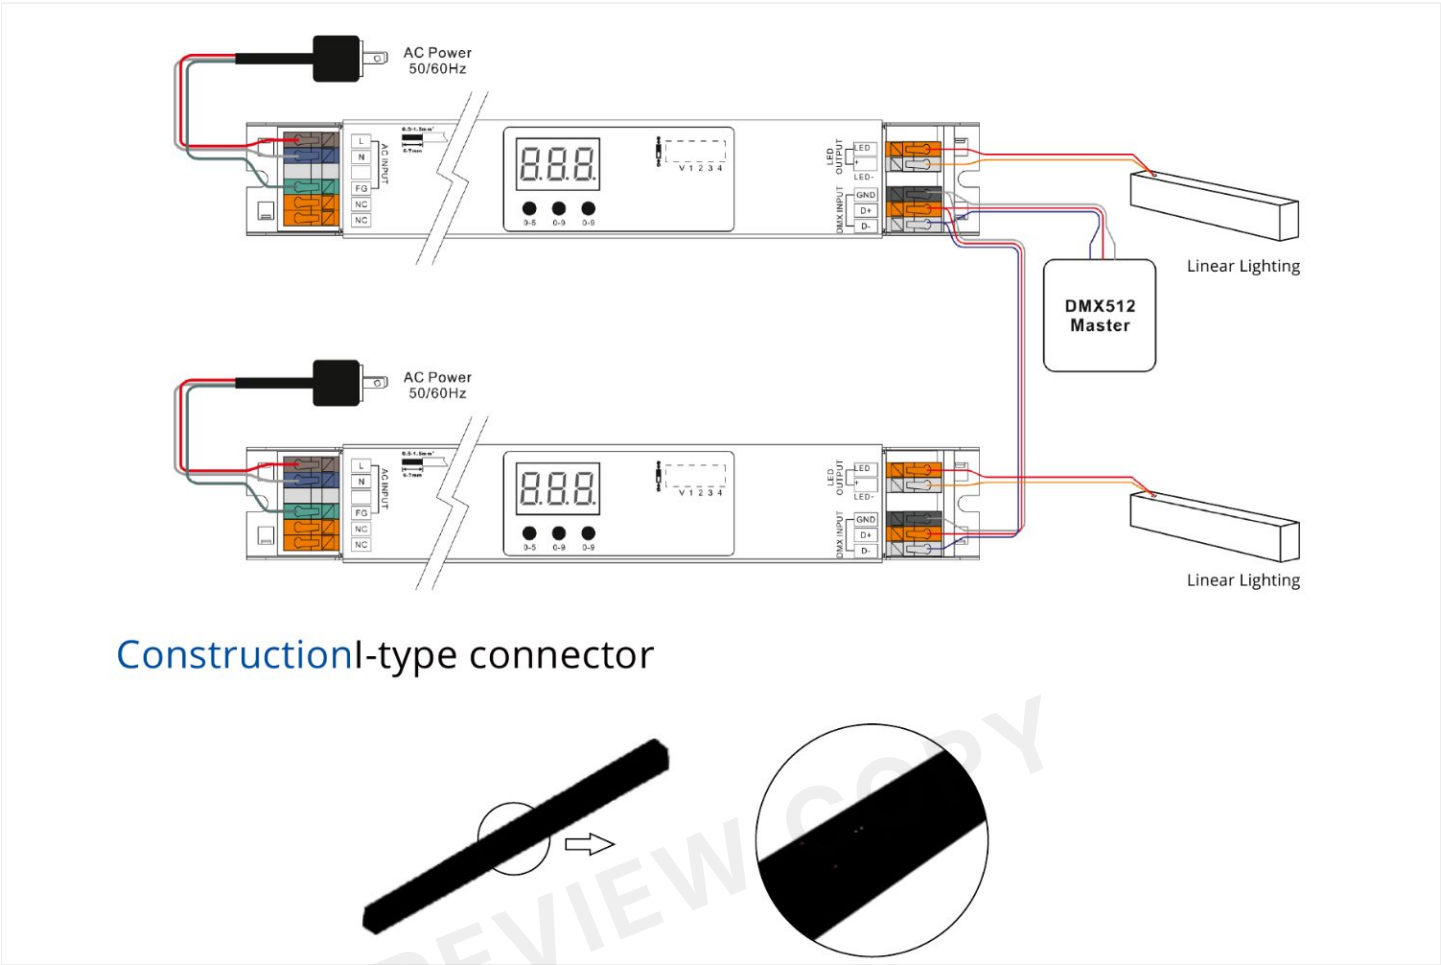

WIRING DIAGRAM

CERTIFICATIONS & COMPLIANCE

UL

UL Listed

DLC

DesignLights Consortium

APPLICATIONS

- Open-plan office ceilings
- Retail sales floors
- Corridors and lobbies
- Educational classrooms
- Conference and training rooms

PROVENANCE — REVIEW COPY ONLY

slug	value	source	confidence
lumens	115 lm	pdf	high
efficacy_lm_per_w	115 lm/W	db	high
cct_k	3,000K / 4,000K / 5,000K	both	high
cri	80	db	high
beam_angle_deg	110°	both	high
led_chip_type	SMD2835	db	high
led_lifetime_h	50,000 h	pdf	high
color	White	db	high
operating_voltage	120–277 V	pdf	high
wattage	50 W	pdf	high
wire_length	59 in	pdf	medium
product_dimensions	1200 × 60 × 75 mm	pdf	high
finish	White	db	high
material	Aluminum	db	high
mount_type	Suspended, wall, recessed or surface	pdf	high

slug	value	source	confidence
ip_rating	IP20	db	high
ambient_temp_c	-30-50 °C	db	high
operating_humidity	10%-90% RH	pdf	high
warranty_years	1 y	db	high

Specifications subject to change without notice.

REVIEW COPY