


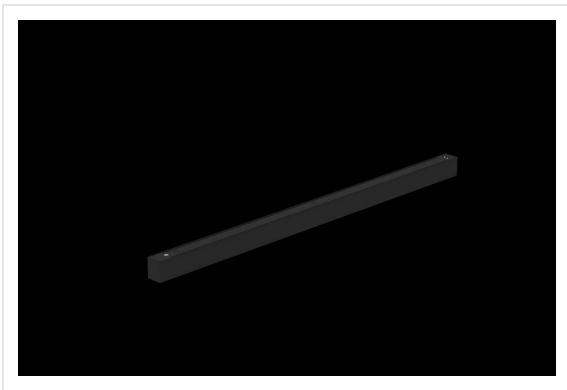

Architectural Linear Fixture, 4 ft, 30-50W Selectable, 4-CCT, 0-10V Dimming, Black Finish

- Field-selectable 30, 40 or 50 W output at 115 lm/W efficacy
- Field-adjustable 3000K, 3500K, 4000K or 5000K CCT at 80 CRI
- 0-10V dimming with power factor 0.95 and THD under 20%
- Extruded 6063 aluminum housing with black RAL 9011 powder coat
- SMD 2835 LEDs rated 50,000 hours with 120-degree beam angle
- UL, cUL, FCC and DLC 5.1 listed with 5-year warranty

OVERVIEW

A 4 ft direct/indirect architectural linear luminaire with an extruded aluminum housing, die-cast end caps and a black powder-coat finish. Screwless end caps and an internal Quick-Link buckle connector support continuous runs, with L, T, X, V and circular corner transition pieces available for open-plan offices, corridors, retail and institutional interiors.

Field-selectable output of 30, 40 or 50 W pairs with field-selectable 3000 K, 3500 K, 4000 K or 5000 K color temperature at 80 CRI and 115 lm/W, up to 1620 lm/ft. The 120-347 VAC Class 2 driver provides 0-10V dimming, power factor 0.95 and THD under 20%. Rated IP20 for dry interior use from -25 to 40 degrees C and 10 to 90% RH, with a 50,000-hour LED lifetime.

UL, cUL, FCC and DLC 5.1 listed. Backed by a 5-year warranty.

SPECIFICATIONS

OPTICAL

Luminous Flux	1,620 lm
Efficacy	115 lm/W
Color Temperature	3,000K / 3,500K / 4,000K / 5,000K
Selectable CCT	Yes
CRI	80
Beam Angle	120°
LED Chip Type	SMD 2835
LED Lifetime	50,000 h

ELECTRICAL

Operating Voltage	120-347 V
Wattage	0.5 W
Power Factor	0.95
Dimmer Type	0 - 10V
Wire Length	59 in

MECHANICAL

Product Dimensions	1205×60×75 mm
Finish	Black
Material	Aluminum
Mounting	Wall/Pole Mount
Weight	3.31 lb

ORDERING

Warranty	5 y
----------	-----

ENVIRONMENTAL

IP Rating	IP20
Environmental Rating	Non - Waterproof
Ambient Operating Temperature	-25-40 °C -13-104 °F
Operating Humidity	10%-90% RH

DIMENSIONS & DIAGRAMS

- DLC Premium, up to 1620LM/FT
- Direct and indirect lighting settings 70% direct / 30% indirect

Corners:

- Corners and other transition pieces are fully luminous
- Uses Male/Female connector to quickly connect power from the last fixture. L, T, X, Y (120°) corners are also available.

Finish:

- All painted surfaces are premium powder coated baked on for maximum durability and color stability
- W: White (RAL 9016); Black (RAL 9011); Silver (RAL 9006)

WIRING

CERTIFICATIONS & COMPLIANCE

UL

UL Listed

DLC

DesignLights Consortium

FCC

FCC

APPLICATIONS

Open-plan office ceilings

Corridors and circulation spaces

Retail and showroom interiors

School and university classrooms

Healthcare and administrative buildings

PROVENANCE — REVIEW COPY ONLY

slug	value	source	confidence
lumens	1,620 lm	pdf	high
efficacy_lm_per_w	115 lm/W	db	high
cct_k	3,000K / 3,500K / 4,000K / 5,000K	both	high
cct_selectable	Yes	db	high
cri	80	db	high
beam_angle_deg	120°	both	high
led_chip_type	SMD 2835	db	high
led_lifetime_h	50,000 h	pdf	high
operating_voltage	120-347 V	pdf	high
wattage	0.5 W	pdf	high
power_factor	0.95	db	high
dimmer_type	0 - 10V	db	high
wire_length	59 in	pdf	medium
product_dimensions	1205×60×75 mm	db	high
finish	Black	db	high
material	Aluminum	db	high
mount_type	Wall/Pole Mount	db	high
weight	3.31 lb	pdf	high
ip_rating	IP20	both	high

slug	value	source	confidence
environmental_rating	Non - Waterproof	db	high
ambient_temp_c	- 25~40 °C	db	high
operating_humidity	10% - 90% RH	pdf	high
warranty_years	5 y	both	high

Specifications subject to change without notice.

REVIEW COPY