


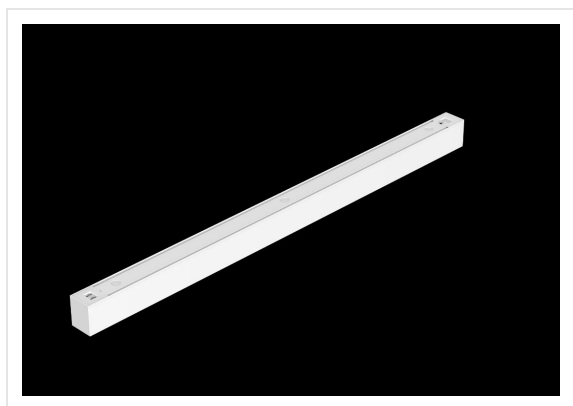

Architectural Linear Fixture, 8 ft, 60 - 100 W Selectable, 4 - CCT 3000-5000 K, 120-Degree Beam

- Field-selectable 60 W, 80 W or 100 W output at 115 lm/W
- Field-adjustable CCT: 3000 K, 3500 K, 4000 K and 5000 K
- SMD 2835 LEDs rated 50,000 hours with CRI 80
- Extruded aluminum housing, white finish, 2405 × 60 × 75 mm
- 0-10 V dimming with 0.9 power factor
- UL listed and DLC 5.1 qualified with 5-year warranty

OVERVIEW

An 8 ft architectural linear luminaire in a white powder-coated extruded aluminum housing, measuring 2405 × 60 × 75 mm. Direct and indirect distribution with a 120-degree beam angle suits open-plan offices, corridors, retail interiors and institutional spaces where continuous or single-run linear layouts are specified. Wall and suspended mounting are supported, and the fixture is IP20 rated for dry interior use.

Field-selectable wattage covers 60 W, 80 W and 100 W, with field-adjustable CCT at 3000 K, 3500 K, 4000 K and 5000 K. SMD 2835 LEDs deliver 1620 lm at 115 lm/W with CRI 80, rated L80B20 at 50,000 hours. Control is 0-10 V dimming, power factor is 0.9, and the ambient operating range is -25 C to 40 C. A 1.5 m power cord is supplied.

UL listed and DLC 5.1 qualified, backed by a 5-year warranty.

SPECIFICATIONS

OPTICAL

Luminous Flux	1,620 lm
Efficacy	115 lm/W
Color Temperature	3,000K / 3,500K / 4,000K / 5,000K
Selectable CCT	Yes
CRI	80
Beam Angle	120°
LED Chip Type	SMD 2835
LED Lifetime	50,000 h

ELECTRICAL

Operating Voltage	120-347 V
Wattage	0.5 W
Power Factor	0.9
Dimmer Type	0 - 10V
Wire Length	59 in

MECHANICAL

Product Dimensions	2405×60×75mm
Finish	White
Material	Aluminum
Mounting	Wall/Pole Mount
Weight	3.31 lb

ORDERING

Warranty	5 y
----------	-----

ENVIRONMENTAL

IP Rating	IP20
Environmental Rating	Non - Waterproof
Ambient Operating Temperature	-25-40 °C -13-104 °F
Operating Humidity	10%-90% RH

DIMENSIONS & DIAGRAMS

- DLC Premium, up to 1620LM/FT
- Direct and indirect lighting settings 70% direct / 30% indirect

Corners:

- Corners and other transition pieces are fully luminous
- Uses Male/Female connector to quickly connect power from the last fixture. L, T, X, Y (120°) corners are also available.

Finish:

- All painted surfaces are premium powder coated baked on for maximum durability and color stability
- W: White (RAL 9016); Black (RAL 9011); Silver (RAL 9006)

WIRING

CERTIFICATIONS & COMPLIANCE

UL

UL Listed

DLC

DesignLights Consortium

APPLICATIONS

Open-plan office ceilings

Corridors and circulation spaces

Retail and showroom interiors

School and institutional classrooms

Lobbies and reception areas

PROVENANCE — REVIEW COPY ONLY

slug	value	source	confidence
lumens	1,620 lm	both	high
efficacy_lm_per_w	115 lm/W	db	high
cct_k	3,000K / 3,500K / 4,000K / 5,000K	both	high
cct_selectable	Yes	db	high
cri	80	db	high
beam_angle_deg	120°	both	high
led_chip_type	SMD 2835	db	high
led_lifetime_h	50,000 h	pdf	high
operating_voltage	120-347 V	pdf	high
wattage	0.5 W	pdf	high
power_factor	0.9	db	high
dimmer_type	0 - 10V	db	high
wire_length	59 in	pdf	medium
product_dimensions	2405×60×75mm	db	high
finish	White	db	high
material	Aluminum	db	high
mount_type	Wall/Pole Mount	db	high
weight	3.31 lb	pdf	high
ip_rating	IP20	both	high

slug	value	source	confidence
environmental_rating	Non - Waterproof	db	high
ambient_temp_c	- 25~40 °C	db	high
operating_humidity	10% - 90% RH	pdf	high
warranty_years	5 y	both	high

Specifications subject to change without notice.

REVIEW COPY