


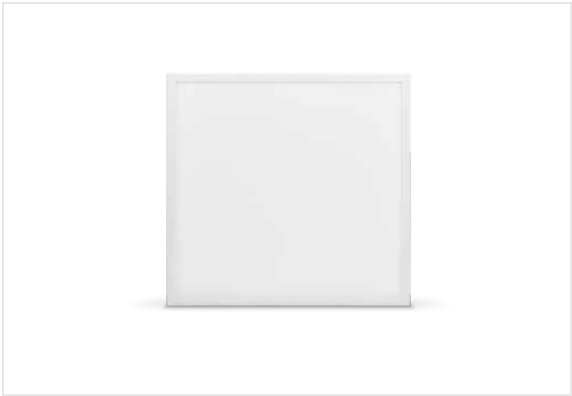

2x2 Flat LED Panel Light, 40W, 85 - 265VAC, CRI>80, 50000h Life

- Delivers 40W of output with efficacy rated at 80 lm/W
- Wide input voltage range of 85 - 265VAC for broad electrical compatibility
- CRI greater than 80 for accurate color rendering
- Rated LED lifetime of 50,000 hours
- Backed by a 1-year manufacturer warranty

OVERVIEW

The 9-P2×2-40W is a 2×2 flat LED panel light designed for commercial and institutional applications including offices, retail spaces, and healthcare facilities. Its low-profile form factor and broad input voltage range make it suitable for a variety of installation environments.

The panel operates at 40W across a wide input range of 85-265VAC, offering compatibility with diverse electrical systems. It carries a Color Rendering Index (CRI) greater than 80, supporting accurate color representation in task-oriented environments, with a rated efficacy of 80 lm/W and a power factor of 0.5. The LED source is rated for 50,000 hours of operation.

This product includes a 1-year manufacturer warranty.

SPECIFICATIONS

OPTICAL

Efficacy	80 lm/W
CRI	80
LED Lifetime	50,000 h

ELECTRICAL

Operating Voltage	85–265 V
Wattage	40 W

ORDERING

Warranty	1 y
----------	-----

APPLICATIONS

- Office ceiling lighting
- Retail sales floor illumination
- Healthcare facility lighting
- Institutional corridor lighting

PROVENANCE — REVIEW COPY ONLY

slug	value	source	confidence
efficacy_lm_per_w	80 lm/W	pdf	high
cri	80	pdf	high
led_lifetime_h	50,000 h	db	high
operating_voltage	85–265 V	pdf	high
wattage	40 W	db	high
warranty_years	1 y	db	high

Specifications subject to change without notice.