


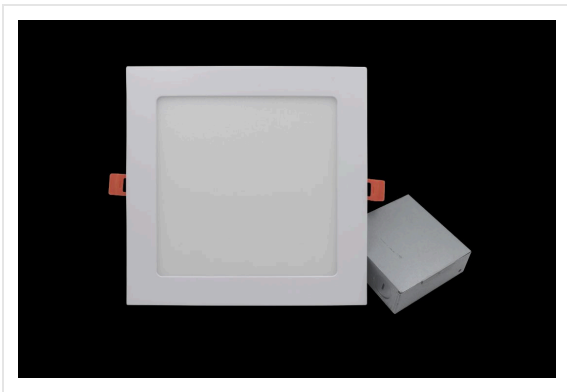

11-Inch Square LED Downlight, 24W CCT-Selectable 3000K/4000K/5000K, 2040lm

- CCT-selectable between 3000K, 4000K and 5000K
- 24W input delivers 2,040 lumens at 95 lm/W efficacy
- Aluminum housing rated IP63 with 180° beam angle
- Triac dimmable, 120V operating voltage
- 50,000-hour rated LED lifetime with CRI 80
- ETL and Energy Star certified, RoHS compliant, 3-year warranty

OVERVIEW

The A-E11-S24-CCT is an 11-inch square LED downlight designed for commercial and light industrial ceiling applications where color temperature flexibility is required. The CCT-selectable design allows field adjustment across multiple white light settings, making it suitable for retrofit and new construction projects where lighting conditions may vary by zone or tenant.

The fixture operates at 24W with a rated output of 2,040 lumens and an efficacy of 95 lm/W, delivering a CRI of 80 across a 180° beam angle. Rated for 50,000 hours of service life, the aluminum housing carries an IP63 rating and an ambient operating range of -40°C to 45°C. The unit is triac dimmable and operates on 120V input. Overall dimensions are 12.5" x 13.75" x 2.75" with a shipping weight of 2.9 lbs.

The fixture is ETL and Energy Star certified, with RoHS compliance, and carries a 3-year warranty.

SPECIFICATIONS

OPTICAL

Luminous Flux	2,040 lm
Efficacy	95 lm/W
Color Temperature	3,000K / 4,000K / 5,000K
CRI	80
Beam Angle	180°
LED Lifetime	50,000 h
Light Color	White
Lens Type	Polycarbonate

MECHANICAL

Product Dimensions	12.5 × 13.75 × 2.75 in
Finish	White
Material	Aluminum
Weight	2.9 lb

ELECTRICAL

Operating Voltage	120 V
Wattage	24 W
Dimmer Type	Triac

ENVIRONMENTAL

IP Rating	IP63
Ambient Operating Temperature	-40-45 °C -40-113 °F

ORDERING

Warranty

3 y

CERTIFICATIONS & COMPLIANCE

ETL

ETL Listed

ENERGY STAR

ENERGY STAR

RoHS

RoHS Compliant

APPLICATIONS

Commercial office ceilings

Retail retrofit lighting

Light industrial interiors

Multi-tenant building upgrades

New construction recessed lighting

PROVENANCE — REVIEW COPY ONLY

slug	value	source	confidence
lumens	2,040 lm	db	high
efficacy_lm_per_w	95 lm/W	db	high
cct_k	3,000K / 4,000K / 5,000K	db	high
cri	80	db	high
beam_angle_deg	180°	db	high
led_lifetime_h	50,000 h	db	high
color	White	db	high
lens_type	Polycarbonate	db	high
operating_voltage	120 V	db	high
wattage	24 W	db	high
dimmer_type	Triac	db	high
product_dimensions	12.5 × 13.75 × 2.75 in	db	high
finish	White	db	high
material	Aluminum	db	high
weight	2.9 lb	db	high
ip_rating	IP63	db	high
ambient_temp_c	-40–45 °C	db	high
warranty_years	3 y	db	high

Specifications subject to change without notice.