


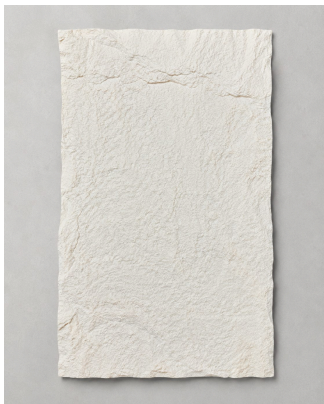

**PU Stone Wall Panel, Ash Grey
Synthetic Stone, 120 cm x 60 cm, 30
mm Thickness**

- 120 cm x 60 cm panel format at 30 mm thickness
- Polyurethane synthetic stone weighing 2.28 kg per panel
- Ash Grey finish imitating large-format natural stone
- Packaged 10 units per box for interior or exterior work
- Adhesive fastening over level, dust-free substrates
- Cleans with a pressure washer not exceeding 100 PSI

OVERVIEW

The Signature Wall Collection PU Stone Wall Panel is a polyurethane synthetic stone finishing panel for interior and exterior construction. The Ash Grey finish imitates large-format natural stone and is specified for receptions, fitness centers, bedrooms and living rooms.

Each panel measures 120 cm x 60 cm (47.2 in width, 2 ft length) with a 30 mm thickness and weighs 2.28 kg, keeping the material lightweight, flexible and adaptable to a range of substrates. Panels ship 10 units per box. Installation calls for a level substrate free of bituminous material, moisture and dust, panels cut to size with a cutting saw, and a manufacturer-recommended adhesive distributed evenly across the back face. Maintenance is limited to dust removal with a garden hose or pressure washer not exceeding 100 PSI.

Warranty policies require inspection at delivery; panels showing visible defects should not be installed and must be reported to the salesperson.

SPECIFICATIONS

MECHANICAL

Product Dimensions	120 cm x 60 cm
Finish	Ash Grey
Material	Synthetic Stone
Mounting	Adhesive-mounted to prepared substrate
Weight	5.03 lb

DIMENSIONS & DIAGRAMS

Product Name	PU Stone Wall Panel
Format	120 cm x 60 cm
Weight	2.28 kg
Packaging	Box of 10 units
Thickness	3 cm
Density	-
Main Material	Polyurethane
Country of Origin	China

Tools: Cutting saw, safety gloves and glasses, mounting adhesive.

- Surface preparation:**
It must be level, free of bituminous material, moisture and dust.
- Cuts:**
Use a saw to cut the PU Stone panels according to the required measurements and shapes. Make sure to follow the manufacturer's instructions for a precise cut.
- Fastening:**
Apply an adhesive recommended by the manufacturer to the back of each panel. Make sure to distribute the adhesive evenly.
- Finishing:**
Make additional cuts in the panels as needed to fit corners and edges. Use specific trims or accessories for a professional finish.
- Maintenance:**
If necessary, remove dust buildup with a garden hose or pressure washer not exceeding 100 PSI, and take the necessary safety measures to avoid damage.

WARRANTY POLICIES

- Verify and receive the product to your satisfaction at the time of delivery. Claims for shortages, damage or dents after the merchandise has been received will not be accepted.
- The original manufacturer does not cover warranties for installed products that show differences in size, tone, color, scratches, warping or any visible defect that could have been detected before

INSTALLATION

APPLICATIONS

- Reception and lobby feature walls
- Fitness center interiors
- Bedroom and living room accent walls
- Exterior facade cladding
- Retail and hospitality interiors

PROVENANCE — REVIEW COPY ONLY

slug	value	source	confidence
product_dimensions	120 cm x 60 cm	pdf	high
finish	Ash Grey	db	high
material	Synthetic Stone	db	high
mount_type	Adhesive - mounted to prepared substrate	pdf	high
weight	5.03 lb	pdf	high

Specifications subject to change without notice.