


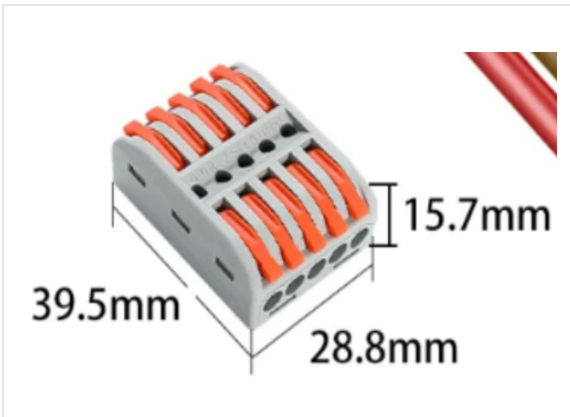

5-5 Port Press-On Wire Connector,
250V 32A, 24AWG-10AWG Input

- Rated for 250V at 32A maximum load
- Accepts input wire gauges from 24AWG to 10AWG (0.05-6mm2)
- Accepts output wire gauges from 28AWG to 12AWG (0.08-4mm2)
- 5-port to 5-port press-on configuration
- Packaged 5 pieces per bag

OVERVIEW

This press-on connector provides a 5-to-5 port wire splicing solution for electrical and lighting installations requiring quick, tool-optional termination. It accepts a range of conductor sizes on both input and output sides, making it suitable for connecting mixed-gauge wiring runs.

The connector is rated for 250V and 32A, with an input range of 24AWG-10AWG (0.05-6mm2) and an output range of 28AWG-12AWG (0.08-4mm2). It is supplied in packs of 5 pieces per bag.

SPECIFICATIONS

ELECTRICAL

Wire Gauge * 10 AWG

APPLICATIONS

- Junction box wire splicing
- Lighting fixture wiring connections
- Low-voltage control wiring
- Panel and enclosure wire termination

PROVENANCE — REVIEW COPY ONLY

slug	value	source	confidence
wire_gauge	10 AWG	pdf	low

* Value inferred from source data; verify before specification.
Specifications subject to change without notice.