


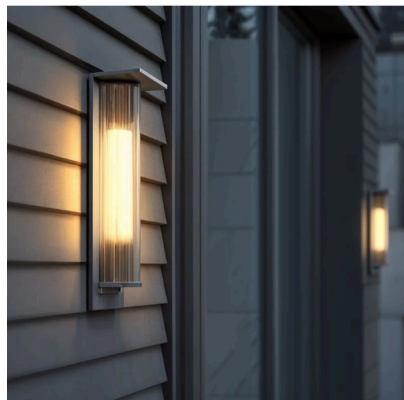

LED Outdoor Wall Lamp, 6 W, IP65, 120-240 V AC, Stainless Steel and Acrylic, Nickel

- Stainless steel frame with ribbed acrylic diffuser
- IP65-rated enclosure for exposed exterior mounting
- 6 W draw on 120-240 V AC input
- 80 lm/W efficacy in white light output
- 50,000-hour rated LED life
- Nickel finish, 7 × 11.8 in (18 × 30 cm) body

OVERVIEW

The Karasi is a wall-mounted outdoor luminaire built on a stainless steel frame with a ribbed acrylic diffuser in a nickel finish. It measures 7 × 11.8 in (18 × 30 cm) and suits facades, entries and perimeter walls where a minimalist surface-mounted fixture is required.

The fixture draws 6 W at 120-240 V AC and produces white light at an efficacy of 80 lm/W, with a rated LED life of 50,000 hours. An IP65 rating and waterproof, rust-resistant construction allow installation in exposed exterior locations.

SPECIFICATIONS

OPTICAL

Luminous Flux	80 lm
Efficacy	80 lm/W
LED Lifetime	50,000 h
Light Color	White

MECHANICAL

Product Dimensions	7 × 11.8 in
Finish	Nickel
Material	Stainless Steel & Acrylic
Mounting	Wall mount

ELECTRICAL

Operating Voltage	110-240 V
Wattage	6 W

ENVIRONMENTAL

IP Rating	IP65
Environmental Rating	Waterproof

DIMENSIONS & DIAGRAMS

IP rate	IP65
Environment Rating:	Waterproof

Lumens	80 lm/w
Power:	6 W
Voltage:	120V - 240V AC
Rated Life:	50,000 hours

FEATURES:

This is a modern minimalist-style lamp suitable for a variety of houses.
It will last for years with its waterproof and rust-proof design.
It is fashionable, warm, and vivacious.
Waterproof with IP65 protection level.
It applies to patios, villas, gardens, courtyards, hotel entrances, etc.
LEDs with 50,000 hours of operating life.
110-240V/3.7V LEDs that last longer than ever with even lighting.

1574 NW 108th Ave. Miami, FL 33172

www.poliledsigns.com

Tel: (305) 384-7550

DIMENSIONS

APPLICATIONS

- Building facades and exterior walls
- Patio and courtyard walls
- Garden and landscape perimeter walls
- Hotel and residential entrances
- Villa and townhouse exteriors

PROVENANCE — REVIEW COPY ONLY

slug	value	source	confidence
lumens	80 lm	pdf	high
efficacy_lm_per_w	80 lm/W	db	high
led_lifetime_h	50,000 h	pdf	high
color	White	db	high
operating_voltage	110–240 V	pdf	high
wattage	6 W	pdf	high
product_dimensions	7 × 11.8 in	pdf	high
finish	Nickel	db	high
material	Stainless Steel & Acrylic	db	high
mount_type	Wall mount	pdf	high
ip_rating	IP65	both	high
environmental_rating	Waterproof	db	high

Specifications subject to change without notice.