


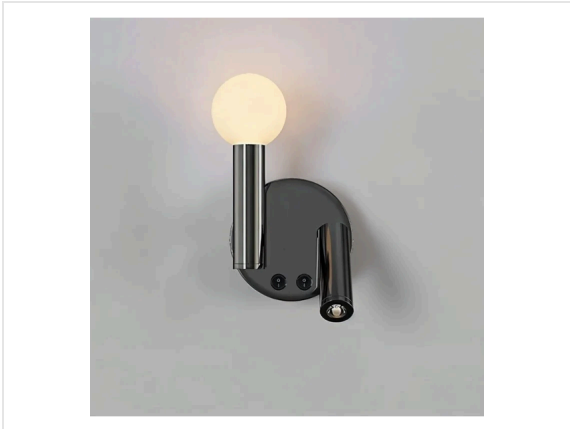

Dual-Light LED Reading Lamp, 7 W,
Selectable 3000/4000/6000 K, IP20
Wall Mount

- 7 W draw with 110 lm/W efficacy
- Selectable 3000 K, 4000 K or 6000 K output
- Aluminum and acrylic body in a black finish
- Adjustable spotlight plus vertical LED for task and ambient light
- IP20 non-waterproof rating for dry interior locations
- 50,000-hour rated LED life on 120-240 V AC

OVERVIEW

The Auralume reading lamp is a wall-mounted dual-light fixture built from aluminum and acrylic, combining an adjustable spotlight for task work with a vertical LED element for ambient fill. The wall-mounted body measures 4.7 × 8.4 in (12 × 21.5 cm) and keeps bedside and seating surfaces clear, suiting guest rooms, apartments and hospitality headboard walls.

The fixture draws 7 W and operates on 120-240 V AC, with selectable color temperatures of 3000 K, 4000 K and 6000 K and a rated life of 50,000 hours. Efficacy is 110 lm/W. The IP20, non-waterproof construction is intended for dry interior locations in a black finish.

SPECIFICATIONS

OPTICAL

Luminous Flux	110 lm
Efficacy	110 lm/W
Color Temperature	3,000K / 4,000K / 6,000K
LED Lifetime	50,000 h
Light Color	White

MECHANICAL

Product Dimensions	4.7 × 8.4 in
Finish	Black
Material	Aluminum & Acrylic
Mounting	Wall mounted

ELECTRICAL

Operating Voltage	120 V
Wattage	7 W

ENVIRONMENTAL

IP Rating	IP20
Environmental Rating	Non-Waterproof

DIMENSIONS & DIAGRAMS

CCT	3000, 4000, 6000K
IP rate	IP20
Environment Rating:	Non-Waterproof

Lumens	110 lm/W
Power:	7 w
Voltage:	120V - 240V AC
Rated Life:	50,000 hours

FEATURES:

Easily directs light exactly where you need it.
Sleek aluminum and acrylic design enhances contemporary interiors.
Adjustable spotlight ensures precision for reading or detailed tasks.
Vertical LED provides warm, relaxing light for cozy ambiance.
Wall-mounted design keeps bedside tables free and uncluttered.

1574 NW 108th Ave. Miami, FL 33172

www.poliledsigns.com

Tel: (305) 384-7550

DIMENSIONS

APPLICATIONS

- Hotel and guest room headboard walls
- Residential bedside and reading nooks
- Apartment and dormitory bedrooms
- Assisted living resident rooms
- Contemporary interior accent walls

PROVENANCE — REVIEW COPY ONLY

slug	value	source	confidence
lumens	110 lm	pdf	high
efficacy_lm_per_w	110 lm/W	db	high
cct_k	3,000K / 4,000K / 6,000K	both	high
led_lifetime_h	50,000 h	pdf	high
color	White	db	high
operating_voltage	120 V	pdf	high
wattage	7 W	pdf	high
product_dimensions	4.7 × 8.4 in	pdf	high
finish	Balck	db	high
material	Aluminum & Acrylic	db	high
mount_type	Wall mounted	pdf	high
ip_rating	IP20	both	high
environmental_rating	Non - Waterproof	db	high

Specifications subject to change without notice.